




### SHIELDS FIRE-ACOL FUEL FILL HOSE

- **Fuel Fill – Gas Or Diesel**
- **For Pleasure Boats Only**

Resists gasoline/alcohol blends. Compounded for low permeation. Reinforced with wire helix imbedded between plies of HD synthetic cord. Abrasion resistant.

Temperature range: -5° to 180° F

Meets SAE J1527 Type A2 and ISO 7840  
Type A2 NMMA/CE Type Accepted

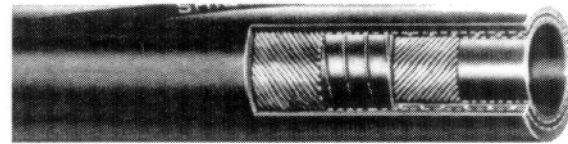

TYPE 2 VENT/FILL HOSE

TYPE 2 VENT/FILL HOSE					TYPE 2 VENT/FILL HOSE			
I.D.	O.D.	Ply	Burst Pressure	Wt. "C"	50' Coils Code #	12 1/2' Length Code #	12 1/2' Carton Code #	10' Carton Code #
1 1/2"	1 57/64"	2	90#	77	16-350-1120	16-350-1124	16-350-1124BX	16-350-1123BX
1 5/8"	2 3/64"	2	90#	89	16-350-1580	16-350-1584	16-350-1584BX	16-350-1583BX
1 7/8"	2 9/32"	2	90#	114	16-350-1780	16-350-1784	16-350-1784BX	16-350-1783BX
2"	2 31/64"	2	90#	121	16-350-2000	16-350-2004	16-350-2004BX	16-350-2003BX
2 3/8"	2 27/32"	2	90#	137	16-350-2380	16-350-2384	16-350-2384BX	16-350-2383BX

### SHIELDS FIRE-ACOL — "C" FUEL FILL HOSE

- **Extra Flexible Fuel Fill – Gas Or Diesel**
- **For Pleasure Boats Only**

Resists gasoline/alcohol blends. Compounded for low permeation. Corrugated cover for extra flexibility. Reinforced with wire helix imbedded between plies of HD synthetic cord. Abrasion resistant.

Temperature range: -5° to 180° F

Meets SAE J1527 Type A2 and ISO 7840  
Type A2 NMMA/CE Type Accepted



I.D.	O.D.	Ply	Burst Pressure	Wt. "C"	Bulk Pack 50' Coils	12 1/2' Length	Dist. Pkg. 10' Length
1 1/2"	1 57/64"	2	90#	77	16-351-1120	16-351-1124	16-351-1123


### SILVERADO 2000 OUTBOARD FUEL HOSE

- **Premium Outboard Fuel Fill**
- **Fuel Tank Vent (Outside Engine Compartment)**
- **For Pleasure Craft Only**

Resistant to gasoline/alcohol blends. Remains flexible at low temperatures. UV resistant.

Temperature range: -5° to 180° F

Meets SAE J1527 Type B2



I.D.	O.D.	Ply	Burst Pressure	Wt. "C"	Bulk Pack Code #	50' R/O Ctn. Code #	Dist. Pkg. 25' R/O Ctn. Code #	10' Polypac Code #
1/4"	17/32"	2	175#	9.2	16-315-0140 (250' reel)	16-315-0146	16-315-0145	16-315-0143
5/16"	19/32"	2	175#	10.8	16-315-0560 (250' reel)	16-315-0566	16-315-0565	16-315-0563
3/8"	21/32"	2	175#	12.3	16-315-0380 (250' reel)	16-315-0386	16-315-0385	16-315-0383
5/8"	29/32"	2	175#	24.0	16-315-0580 (250' reel)	16-315-0586	16-315-0585	16-315-0583