



SHIELDS HOSE AC Duct/Ventilation Hose

SHIELDS

SHIELDS 400/402 VINYLVENT

- *Venting Of Bilge Fumes*

PVC supported by anodized wire helix. Resistant to UV and ozone.




I.D.	O.D.	Wt/ "C"	Bulk Pack 50' Length Code # White	Dist. Pkg. 10' Polypac Code # White
3"	3 1/8"	8	16-400-3000	16-400-3003
4"	4 1/8"	10	16-400-4000	16-400-4003
3"	3 1/8"	8	Code # Black 16-402-3000	Code # Black 16-402-3003
4"	4 1/8"	10	16-402-4000	16-402-4003

SHIELDS EXTRA HEAVY DUTY VINYLVENT

- *Venting Of Bilge Fumes*

Extra heavy PVC wall. Supported by vinyl coated helical wire. Resistant to: ozone, UV, corrosion. Flame resistant: meets UL 94V standard.

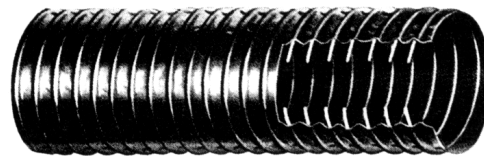

I.D.	O.D.	Wt. "C"	Code No.
3"	3 1/8"	17	16-420-3000
4"	4 1/8"	25	16-420-4000


Bulk Pack: 3" 6 x 50
4" 4 x 50

SHIELDS FIBERVENT

- *Venting Of Bilge Fumes*
- *A/C Ducting Hose*

Vinyl coated woven fiberglass. Supported by vinyl coated helical wire. Resistant to: ozone, UV, corrosion. Flame resistant: meets UL 181 Class 1.

Temperature range: 0° to +250° F

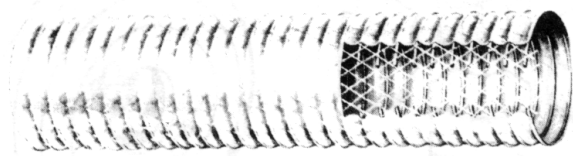

Bulk	I.D.	O.D.	Rating	Vac Wt. "C"	Code No.
6 x 25'	3"	3 1/4"	20	13	16-450-3000
8 x 25'	4"	4 1/4"	20	15	16-450-4000
8 x 25'	5"	5 1/4"	20	17	16-450-5000
4 x 25'	6"	6 1/4"	20	19	16-450-6000
2 x 25'	7"	7 1/4"	20	21	16-450-7000


Temperature range: -65° F thru +300°F

SHIELDS AIR CONDITIONER DUCTING HOSE

- *Venting Of Bilge Fumes*
- *A/C Ducting Hose*

Smooth tube for maximum airflow. Vinyl coated woven fiberglass. Supported by vinyl coated helical wire. Resistant to: ozone, UV, corrosion. Flame resistant: meets UL 94-V-0.

Temperature range: -20° to +200° F

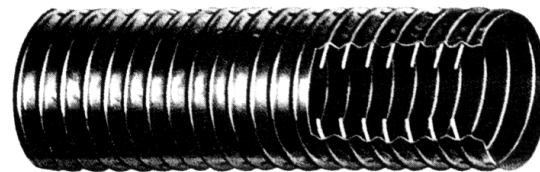

Bulk	I.D.	O.D.	Wt. "C"	Code No.
5 x 25'	3"	3 1/4"	22	16-460-3000
6 x 25'	4"	4 1/4"	24	16-460-4000
5 x 25'	5"	5 1/4"	32	16-460-5000
4 x 25'	6"	6 1/4"	36	16-460-6000
2 x 25'	7"	7 1/4"	44	16-460-7000