

SHIELDS HOSE

Conduit/Clamps



FLAME RETARDANT SPLIT WIRE CONDUIT



- **Provides Chafing Protection For Wiring Systems**


Flame resistant polypropylene. Black with blue stripe. Split longitudinally for easy access to harness.

Temperature range: +275° F

Meets ABYC standard 8.15.19. Meets UL 94 V2

I.D.	Wt. "C"	Code #	Pack	Dist. Pkg.	
				100' R/O Ctn. Code #	50' R/O Ctn. Code #
1/4"	1.26	16-128-0140	3200'	16-128-0147	16-128-0146
3/8"	1.58	16-128-0380	1800'	16-128-0387	16-128-0386
1/2"	2.31	16-128-0120	1000'	16-128-0127	16-128-0126
5/8"	2.94	16-128-0580	750'	16-128-0587	16-128-0586
3/4"	3.47	16-128-0340	450'	16-128-0347	16-128-0346
1"	5.78	16-128-1000	300'	16-128-1007	16-128-1006
1 1/4"	9.24	16-128-1140	200'	16-128-1147	16-128-1146
1 1/2"	15.23	16-128-1120	100'	16-128-1126	
2"	21	16-128-2000	100'		

SHIELDS STERNFLEX




- **Cover For Harness, Hoses On Bracket Mounted Outboard Engines**

Polyethylene copolymer wall with integral polyethylene helix. Resistant to: abrasion, crushing and UV.

Code No.	I.D.	Bend Radius	Wt. "C"
16-126-2000	2"	3	39

Bulk Pack: 50' cartons

GRADE 316 STAINLESS STEEL WORM GEAR HOSE CLAMPS

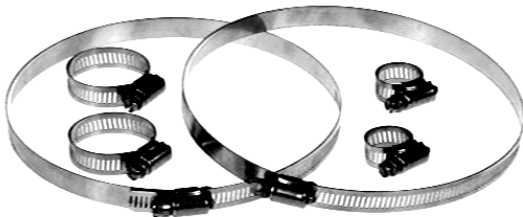

All Components Are Manufactured From Marine Grade 316 Stainless Steel. These Clamps Are Designed To Fit Many Applications From 5/16" to 7" Diameter Hoses.

Sierra No.	AP No.	Diameter Size	Std. No.
18-7307	—	5/16" to 7/8"	006
18-7308	—	9/16" to 1 1/16"	010
18-7309	—	9/16" to 1 1/4"	012
18-7310	—	1 1/16" to 1 1/2"	016
18-7311	—	3/4" to 1 3/4"	020
18-7312	—	1 1/16" to 2"	024
18-7313	—	1 9/16" to 2 1/2"	032
18-7314	—	2 9/16" to 3 1/2"	048
18-7315	590	2 1/2" to 4 1/2"	064
18-7316	096	3" to 5"	072
18-7317	—	5" to 7"	104

① PKG OF 2